


S U P P L Y I N G C L E A N A I R T O I N D U S T R Y

MODEL M33 R&L Media Air Cleaner

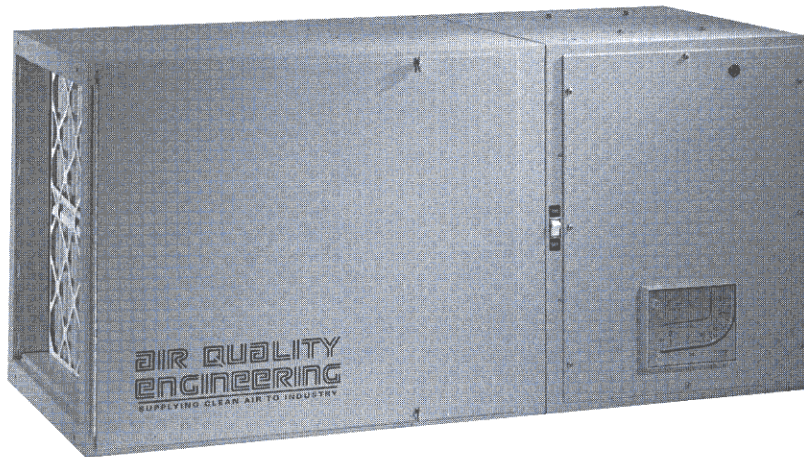

The M33 is a self-contained media air cleaning system designed for general background or ducted for source capture applications. The M33 can be ordered in a three-stage filtration which will effectively remove a broad range of airborne contaminants including fine dusts, smoke, soot, vapors, mist, VOC's and more at a rate of up to 1500 cfm.



**AIR QUALITY
ENGINEERING**

Manufacturer and Worldwide Distributor of Air Cleaning Systems for Over 25 Years

M33 R&L FEATURES & SPECIFICATIONS

DIMENSIONS: 27 1/2" H x 14 1/2" W x 56" L
 WEIGHT: 200 lbs. installed
 240 lbs. shipping weight
 CABINET: 16 gauge welded steel cabinet with a baked enamel, textured coated finish.
 POWER INPUT: 110 - 120 Vac, 60 hz, 1 phase, 12 amps
 208-240 Vac, 60 hz, 1 phase, 6 amps


PRIMARY FILTER: Dimensions on the bag filters are 12" x 24" x 26"
 AIRFLOW/EFFICIENCY:

Stock #	Filter*	CFM = Cubic Feet Per Minute	
		1 HP	WG
41128	95-98% Bag	1125 CFM	1.3
41129	85-90% Bag	1250 CFM	1.1
41130	65-70% Bag	1270 CFM	1.0
41131	45-50% Bag	1315 CFM	1.0


*Efficiency based on ASHRAE Dust Spot 52-76.

AMBIENT TEMPERATURE: 175° maximum.
 MOUNTING: Standing or hanging cabinet with horizontal airflow. Ceiling mount brackets – standard.
 PREFILTER: 30-35% efficiency, pleated 12" x 24" x 4". Filter media is a cotton and synthetic blend. Total prefilter media area is 15 sq. ft.
 MOTOR: 1 HP sealed ball bearings and thermally protected. Adjustable motor sheave allows for field adjustments to the rated air flow.
 BLOWER: Forward curved, ball bearing, belt driven centrifugal blower. This blower is capable of moving 2250 cfm free air.
 INSTRUMENTATION: **Dirty Filter Gage** – Factory installed pressure gage designed to determine filter replacement cycle.
Indicator Light – Light indicates that the blower motor is energized properly.
 FILTER ACCESS: Side load track system with hinged access door.
 SOUND LEVELS: 72 dBA at 9', 70 dBA at 12'.


M33 WITH 95% MAIN FILTER

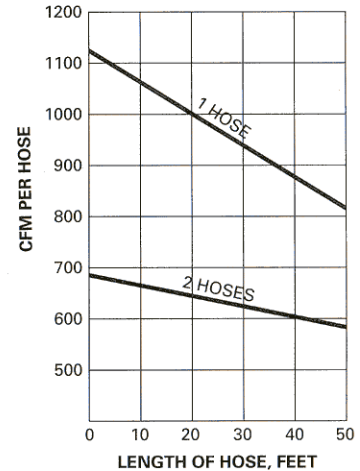

M33L SHOWN WITH OPTIONAL PLENUM

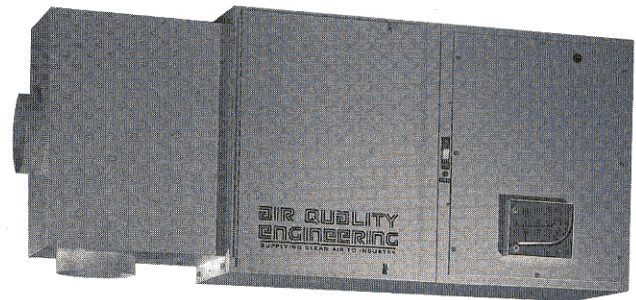

M33L SHOWN WITH OPTIONAL 22 LB. CARBON MODULE & E.S.F. FILTER

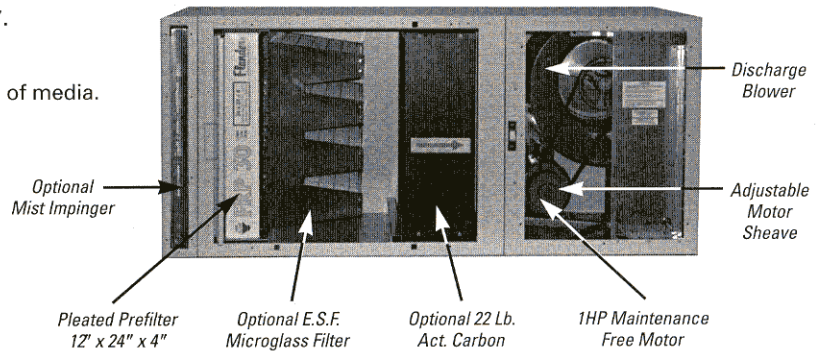


ADDITIONAL FEATURES:

- Primary Filter: Extended service filter with 100 sq. ft. of media.
- 36 month parts warranty.
- One HP maintenance-free motor.
- Dirty filter gage.
- 35% efficient 4" pleated prefilter.
- 10' power cord with molded plug.

OPTIONAL EQUIPMENT:

- Impinger assembly for mist applications.
- Plenum, ducting and hood accessories.
- 2 HP motor upgrade.
- Extended service filter upgrade.
- 65% ASHREA prefilter.



AIR QUALITY ENGINEERING

AIR QUALITY ENGINEERING, INC.

7140 Northland Drive North
 Minneapolis, MN 55428-1520
 (800) 328-0787 • Fax: (763) 531-9900
 aqe@isd.net • www.air-quality-eng.com