




## Applications

Extraction of exhaust gases and other hot gases from motor vehicles.

For all types of spring recoil exhaust hose reels, exhaust fume extractors, and also exhaust rails for moving vehicles.

## Advantages

- Extremely low weight and flexibility makes the hose especially suitable for manual handling.
- Smooth inside reduces friction losses.
- Manufactured with a polyester helix as standard.
- The polyester helix makes the hose regain original shape when run over by motor vehicle.
- Hose lengths can be connected by screwing them together.
- Also available with steel helix in order to withstand higher vacuum.

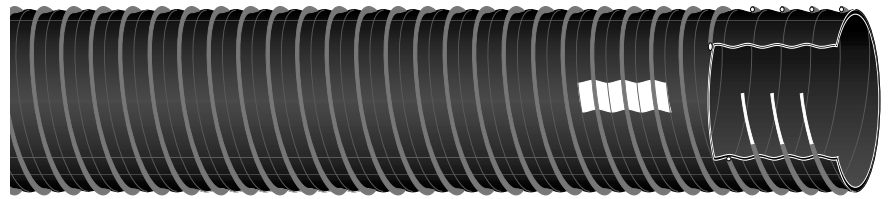

## Technical description

**Inner tube:** heat resistant, rubberized fabric, EPDM/polyester, black.

**Helix:** EPDM-coated polyester.

**Cover:** outside rubberised helix, black.

**Temperature range:** -40 °C to +180 °C.

**Branding:** at each end of the length hose, a white label with printed in black:

 TRELLEBORG AG 1000 - ID - HT

## Complementary information

Packed in cartons.

ID mm	Wall thickness mm	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
32.0	1.0	0.60	40	0.28	10	1977880	1
38.0	1.0	0.55	50	0.32	10	1977840	●
45.0	1.0	0.50	55	0.34	10	1977890	1
51.0	1.0	0.40	65	0.42	10	2860230	●
63.0	1.0	0.30	80	0.53	10	2210510	●
76.0	1.0	0.25	95	0.60	10	2059150	●
102.0	1.0	0.20	110	0.85	10	2059160	●
127.0	1.0	0.15	130	1.04	10	1693510	●
152.0	1.0	0.10	140	1.24	10	1692920	●
204.0	1.0	0.03	190	1.68	10	2955920	●

● = Stock item

1 = Non stock, min. quantity = 50 m.