

ECONOMYARM

The affordable choice



FREE wall bracket
is included
(EA-2,-3 and -4)

**Ball bearing
suspension**

**Ratchet damper
standard**

**7 ft/2 m, 10 ft/3 m and
14 ft/4 m working radius**

**Detachable
steel hood**



© Copyright. All rights reserved.

PLYMOVENT CORP

375 Raritan Center Parkway, Edison, N.J. 08837, USA
Tel. (732) 417-0808, Fax (732) 417-1818
www.plymovent.com, info@plymoventusa.com

PLYMOVENT CANADA INC

6615 Ordan Dr, Unit #3, Mississauga, Ont L5T 1X2, Canada
Tel. (905) 564-4748, Fax (905) 564-4609
www.plymovent.com, info@plymovent.ca

PLYMOVENT[®]
INTELLIGENT PROCESS VENTILATION™

A quality choice at a price anyone can afford

Our new value for money, extraction arm. The EconomyArm is in the low price range but gives performance and features that previously only more expensive arms can offer. A free wall bracket, ball bearing suspension, hood collar and hood are from the well known KUA arm.

FEATURES AND BENEFITS

The EconomyArm is a ball-bearing suspended extraction arm that comes in 7 ft/2 m, 10 ft/3 m or 14 ft/4 m length, Ø 6"/160 mm. The spring balanced support mechanism and the friction brakes provides an extraction arm with smooth operation within the whole working radius. The standard complementary free wall bracket (EA-2,-3 and -4) has a Ø 6"/160 mm duct connection included but can also hold a PlymoVent FUA fan directly without any special brackets. Ball bearing suspension is standard. The support mechanism

is surrounded by a high quality extraction hose. Safety mesh and ratchet air control damper in the removable hood. The hood can also be fitted with a 20 watt halogen working light. See accessories below. The Economy-Arm also comes in a standing model that fits directly to all PlymoVent mobile units. The standing model can also be used in applications with low ceiling heights where a low mounting position is needed. For the standing model an optional wall bracket can be supplied for easy installation.



TECHNICAL DATA

Product no.:	EA-2	EA-2-S	EA-3	EA-3-S	EA-4	EA-4-S
Working radius:	2 m/7'	2 m/7'	3 m/10'	3 m/10'	4 m/14'	4 m/14'
Weight (kg):	17	13.5	18.5	15	20.5	17
Weight (lbs):	37.4	29.7	40.7	33	45.1	37.4
Tube/hose diam:	Ø160 mm/6"					
Rec. airvolume:	800 - 1200 m ³ /h, 470-700 cfm					

Accessories

Halogen light kit: HL-20/24

Transformer

115/24 V: TR-24/75


Extension columns: PA-110 (1,1m/3.6') PA-220 (2,2m/7.2')

Wall bracket: 500538 Note! Standard on EA-2, EA-3 and EA-4.


Quality from top to bottom!



The standard supplied wall bracket (EA-2,-3 and -4) has ball bearings and friction brake for long lasting and smooth operation.

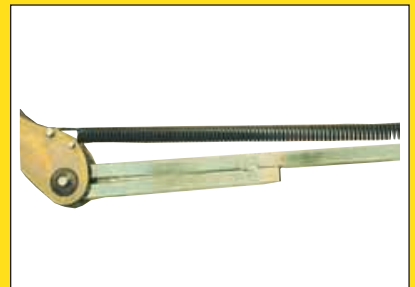

Strong, slim designed support mechanism ensures stability and a minimum of restrictions.

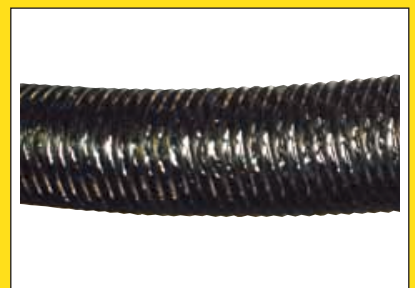

High quality extraction hose is used for extended lifetime (wear & tear).



Hood collar with 360° ring handle and ratchet damper. Detachable spun steel hood.

www.plymovent.com