

# **ECONOMYARM<sup>®</sup>**

The affordable choice



**FREE wall bracket is included (EA-2,-3 and -4)**

**Ball bearing suspension**

**Ratchet damper standard**

**7 ft/2 m, 10 ft/3 m and 14 ft/4 m working radius**

**Detachable steel hood**



© Copyright. All rights reserved.

## **PLYMOVENT CORP**

375 Raritan Center Parkway, Edison, N.J. 08837, USA

Tel. (732) 417-0808, Fax (732) 417-1818

[www.plymovent.com](http://www.plymovent.com), [info@plymoventusa.com](mailto:info@plymoventusa.com)

## **PLYMOVENT CANADA INC**

24 - 1200 Aerowood Dr Mississauga, ON L4W 2S7, Canada

Tel: +1 (905) 564-4748 Fax: +1 (905) 564-4609

[www.plymovent.com](http://www.plymovent.com), [info@plymovent.ca](mailto:info@plymovent.ca)

# **PLYMOVENT<sup>®</sup>**

## **A quality choice at a price anyone can afford**

*Our new value for money, extraction arm. The EconomyArm is in the low price range but gives performance and features that previously only more expensive arms can offer. A free wall bracket, ball bearing suspension, hood collar and hood are from the well known KUA arm.*

## FEATURES AND BENEFITS

The EconomyArm is a ball-bearing suspended extraction arm that comes in 7 ft/2 m, 10 ft/3 m or 14 ft/4 m length, Ø 6"/160 mm. The spring balanced support mechanism and the friction brakes provides an extraction arm with smooth operation within the whole working radius. The standard complementary free wall bracket (EA-2,-3 and -4) has a Ø 6"/160 mm duct connection included but can also hold a PlymoVent FUA fan directly without any special brackets. Ball bearing suspension is standard. The support mechanism

is surrounded by a high quality extraction hose. Safety mesh and ratchet air control damper in the removable hood. The hood can also be fitted with a 20 watt halogen working light. See accessories below. The Economy-Arm also comes in a standing model that fits directly to all PlymoVent mobile units. The standing model can also be used in applications with low ceiling heights where a low mounting position is needed. For the standing model an optional wall bracket can be supplied for easy installation.



### TECHNICAL DATA

Product no.:	EA-2	EA-3	EA-3-S	EA-4	EA-4-S
Working radius:	2 m/7'	3 m/10'	3 m/10'	4 m/14'	4 m/14'
Weight (kg):	17	18.5	15	20.5	17
Weight (lbs):	37.4	40.7	33	45.1	37.4
Tube/hose diam:	Ø160 mm/6"				
Rec. airvolume:	800 - 1200 m <sup>3</sup> /h, 470-700 cfm				

### Accessories


Halogen light kit:	HL-20/24-160				
Transformer	115/24 V: TR-24/75				
Extension columns:	PA-110 (1,1m/3.6')		PA-220 (2,2m/7.2')		
Wall bracket:	500538 Note! Standard on EA-2, EA-3 and EA-4.				

[www.plymovent.com](http://www.plymovent.com)

## Quality from top to bottom!



The standard supplied wall bracket (EA-2,-3 and -4) has ball bearings and friction brake for long lasting and smooth operation.

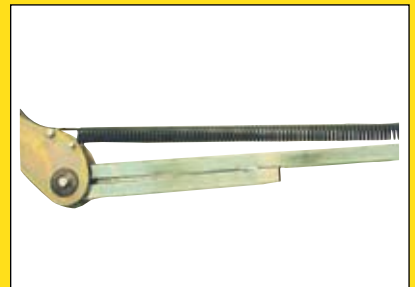

Strong, slim designed support mechanism ensures stability and a minimum of restrictions.



High quality extraction hose is used for extended lifetime (wear & tear).



Hood collar with 360° ring handle and ratchet damper. Detachable spun steel hood.