

FE

Fixed Exhaust Extraction System

TECHNICAL DATA

UNIT SPECIFICATION

Model range

Comes in models

FE-5-75, FE-5-100, FE-5-125 and FE-5-150

Max hose length

Depending on choice of hose diameter.

See chart on next page.

Motor type

Supply power 110 or 220V

Phase 1 phase

Current 2 Amps

Frequency 60 Hz.

Installation

On wall or column.

Maintenance

Normal wear, no maintenance required.

See owner's manual.

Temperature range

Depending on hose, from +150°C/300°F to +1040°C/2000°F.

CONSTRUCTION

A. Balancer.

B. Hose saddle

C. Hose.



Note: Hose must be ordered seperately

D. Fan mounting bracket

Note: See above picture

E. Direct mount fan

Note: See above picture

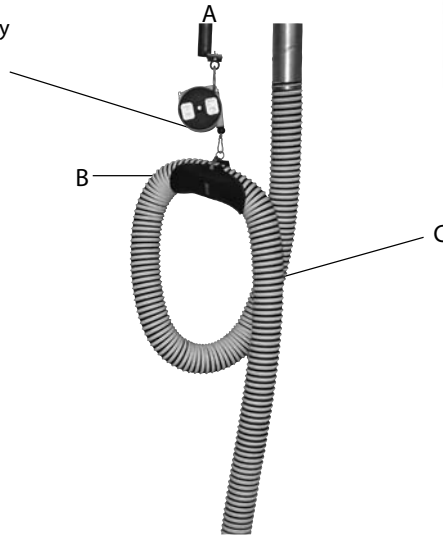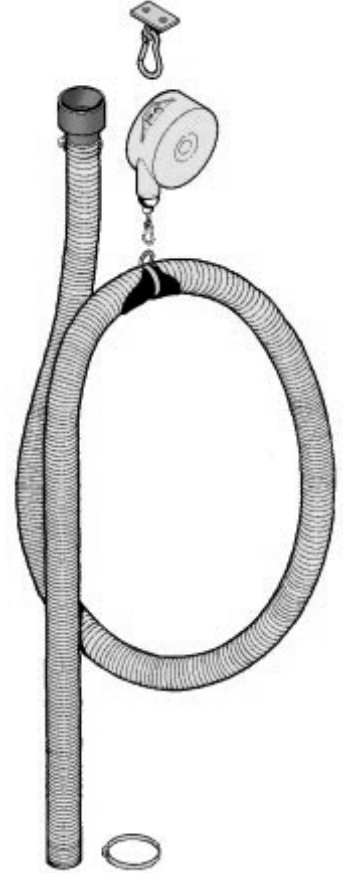

www.plymovent.com

PLYMOVENT®
VEHICLE EXHAUST REMOVAL SYSTEMS

PlymoVent USA
375 Raritan Center Parkway
Edison, NJ 08837
Tel: (800) 644-0911
Fax: (732)417-1818
www.plymovent.com
info@plymoventusa.com

PlymoVent representative