


M67 Media Air Cleaner

Supplying Clean Air to Industry



The Smokemaster® M67 is self-contained multi-stage media air cleaning system designed for general background cleaning of dust, smoke, soot or other airborne particulate. The M67 is a good choice for light duty applications such as sanding, buffing, welding or automotive refinishing at a rate of up to 1980 CFM.

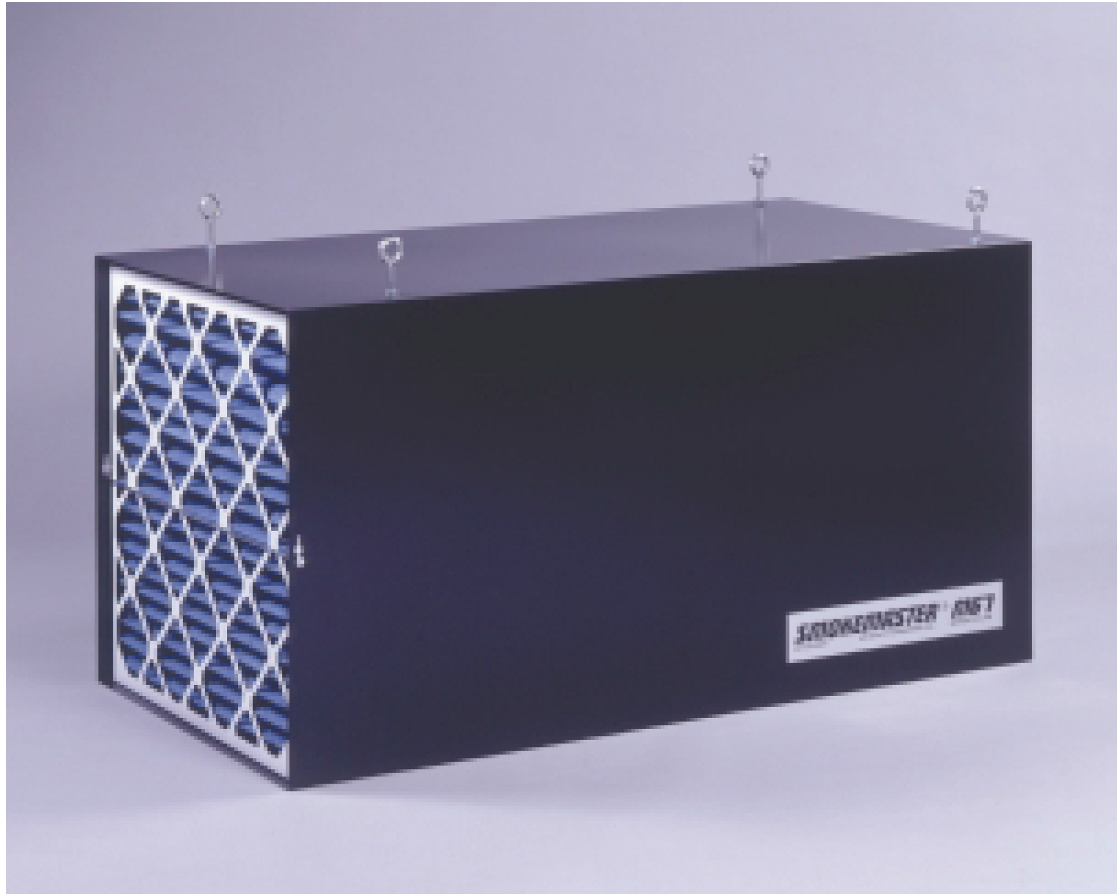

**AIR QUALITY
ENGINEERING**

Air Quality Engineering, founded in 1973, is proud to offer a continued, superior level of experience in manufacturing complete air filtration systems that provide the highest performance, efficiency, and capacity for the money. Our sales and engineering team's mission is to identify the most cost-effective, high-quality solutions for our customers' needs, whether commercial, industrial or residential.

M67 FEATURES & SPECIFICATIONS

STANDARD FEATURES

- Front end load mechanical filter system for easy filter access.
- Adjustable postfilter track for flexibility in postfilter selection.
- 10-foot power cord with molded plug.
- Quality engineering and workmanship backed by a 3-year parts warranty (see owners manual for warranty statement).

OPTIONAL FEATURES

- Wrap-around prefilter.
- 2" carbon filter for odor control.

DIMENSIONS: 24"H x 24"W x 47"L

WEIGHT: 118.5 lbs. Installed
160 lbs. Shipping weight

CABINET: 18-gauge steel cabinet with black enamel paint finish.

POWER INPUT:

VOLTAGE	PHASE	3/4 HP AMPS
110-120	1	8.0
208-240	1	4.0

MOUNTING: Unit may be mounted to ceiling with 3/8 – 16 NC eyebolt included, or on wall with optional mounting hardware.

MOTOR: Heavy-duty 3/4 HP, 3 speed motor with sealed ball bearings.

BLOWER: Direct drive, forward curved capable of 3650 CFM free air.

PREFILTER: 24" x 24" x 2" pleated media.

PRIMARY FILTER: 24" x 24" x 22" multi-pocket bag, or optional filter cube.

INSTRUMENTATION: Dirty Filter Gage – Factory installed pressure gage designed to determine filter replacement cycle.

FILTER ACCESS: Front load

SOUND LEVELS: Max 68 dBA at 15 ft., 71 dBA at 9 ft.

AIRFLOW EFFICIENCY:

STOCK NUMBER	FILTER	(CFM = Cubic Feet Per Minute)		
		HI	MED	LOW
41072	95% Bag	1625 CFM	1400 CFM	1250 CFM
41056	85% Bag	1690 CFM	1530 CFM	1285 CFM
41055	65% Bag	1775 CFM	1605 CFM	1300 CFM
41057	50% Bag	1950 CFM	1655 CFM	1310 CFM
41061	35% Cube	1980 CFM	1705 CFM	1380 CFM

Specifications subject to change without notice.

This product is not available for resale or installation in California.



The M67 cleans wood particles and dust from wood shops.



The M67 is perfect for autobody shops.